

KWF


PFOS & PFOA reduction

Activated carbon composite filter for water treatment

Product overview

KWF is a composite filter for reducing PFOA and PFOS in water. It combines activated carbon, activated carbon fiber and a PFAS adsorbent in a single cartridge.

Breakthrough curves

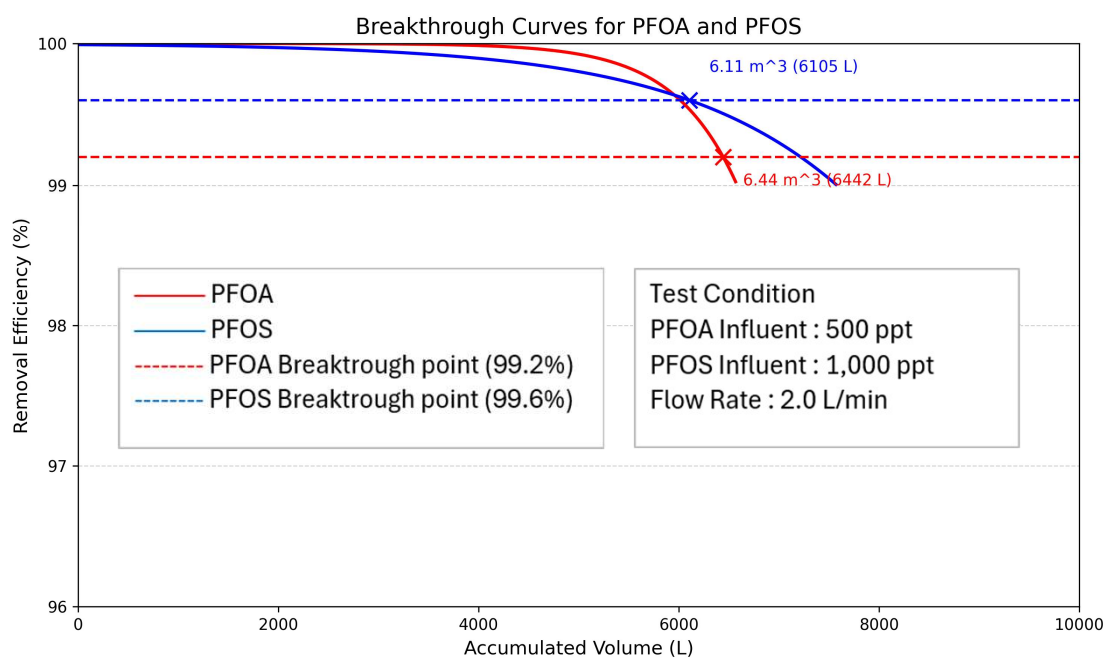

Estimated performance

PFOA: 99.2% reduction up to approx. 6,400 L

PFOS: 99.6% reduction up to approx. 6,100 L

Test flow rate: 2.0 L/min

Curve-based estimates only. No measured or guaranteed capacity at these volumes.

Standard specifications

Carbon media		Granular / powdered activated carbon / ACF/ PFAS adsorbent
Dimensions	Inner diameter	30 mm
	Outer diameter	65 mm
	Length	250 / 500 / 750 mm
Nonwoven fabric		PP / PE
Recommended temperature		≤ 80 ° C*

*Temperature limit from the current specification. Confirm suitability for the intended system.



KOWA COMPANY, LTD. Activated Carbon Section

3-6-29 Nishiki, Naka-ku, Nagoya, Japan Tel +81-52-963-3431
kowa-carbon@kowa.co.jp Fax +81-52-963-3107

